


PIEZO BUZZERS

PANEL MOUNTING TYPE

Model No (with pc pins)	Operating Frequency ± 500 (Hz)	Tone	Minimun Sound Pressure at 60 cm (dB)		Operating Voltage (VDC)		Maximun Operating Current (mA)	
			At Min V	At Max V	Min V	Max V	At Min V	At Max V
ELB750P	3,500	Continuous	87	—	4	28	—	7
ELB751P	3,500	Fast Pulse	70	85	6	28	4	18
ELB753P	3,500	Slow Pulse	70	85	6	28	4	18
ELB755P	3,500	Continuous + Fast Pulse	70	85	6	28	4	18
ELB757P	3,500	Continuous + Slow Pulse	70	85	6	28	4	18

ELB750P series fit 1.25" (31.75 mm) diameter opening in panels to 0.50" (12.54 mm) Thick or PC board mounting.

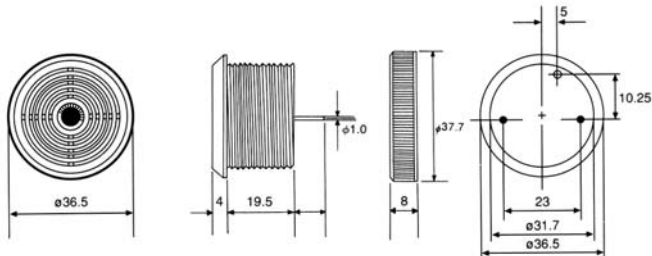

Model No (with leadwires)	Operating Frequency ± 500 (Hz)	Tone	Minimun Sound Pressure at 30 cm (dB)	Operating Voltage (VDC)		Maximun Operating Current (mA)	
				Min V	Max V	At Min V	At Max V
ELB250	3,500	Continuous	87	3	28	2	30
ELB251	3,500	Fast Pulse	85	4	28	—	5
ELB253	3,500	Slow Pulse	87	4	28	—	6

ELB250 series fit 0.75 inch (19.05 mm) diameter opening in panels to 0.125 inch (3.17 mm) thick. Or they can be surface mounted by inserting screws to the loops at either side.

