

MAGNETIC BUZZERS

FLANGE MOUNTING TYPE





color Black
ABS Housing Material
Pin or Leadwire Terminal

ELECTRICAL SPECIFICATIONS



Model No.	ELBTS3060	ELBTS3090	ELBTS3120	ELBTS3240	ELBTS3415
Operating Voltage (VDC)	4 ~ 9	6 ~ 11	9 ~ 15	15 ~ 28	4 ~ 15
Rated Voltage (VDC)	6	9	12	24	12
* Max. Rated Current (mA)	35	40	40	20	15
* Min. Sound Output (dBA/30cm)	85	85	90	90	85
* Frequency (Hz.)	2800 ± 200				
Tone Nature	Single				
Operating Temperature (°C)	-20 ~ +60				
Weight (gm.)	17				

* Value applying at rated voltage

DIMENSIONS

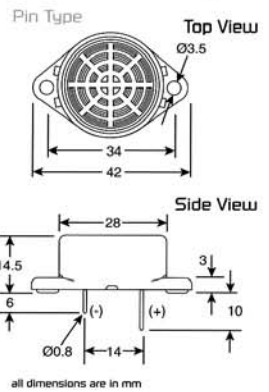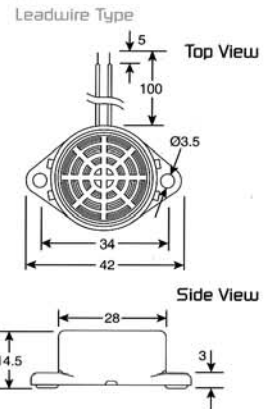

DIMENSIONS

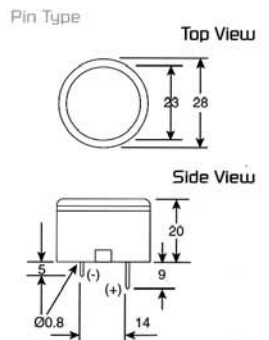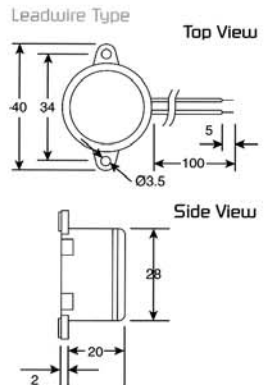

all dimensions are in mm



color Black
ABS Housing Material
Pin or Leadwire Terminal

ELECTRICAL SPECIFICATIONS

Model No.	ELB 2P3015	ELB 2S3030	ELB 2P3030	ELB 2S3060	ELB 2P3060	ELB 2S3060	ELB 2S3090	ELB 2P3090	ELB 2S3090	ELB 2S3120	ELB 2S3415	ELB 2P3120	ELB 2S3120	ELB 2S3240	ELB 2P3240
Operating Voltage (VDC)	1 ~ 3	2 ~ 5	2 ~ 5	4 ~ 9	4 ~ 9	4 ~ 9	6 ~ 11	6 ~ 11	6 ~ 11	9 ~ 15	4 ~ 15	8 ~ 15	8 ~ 15	15 ~ 28	15 ~ 28
Rated Voltage (VDC)	1.5	3	3	6	6	6	9	9	9	12	12	12	12	24	24
* Max. Rated Current (mA)	5	35	8	35	10	35/10	40	10	35/15	40	15	15	40/15	25	20
* Min. Sound Output (dBA/30cm)	70	85	73	90	78	85/70	90	80	85/75	95	90	85	90/80	95	85
* Frequency (Hz.)	2800 ± 200														
Tone Nature	pulse	single	pulse	single	pulse	single	single	pulse	single	single	single	pulse	single	single	pulse
Operating Temperature (°C)	-20 ~ +60														
Weight (gm.)	10														

* Value applying at rated voltage
The Pulse Rating is 2-7Hz at Rated Voltage.