

# INTERMITTENT TONE

**When Ordering: Specify Fast, Medium or Slow Beep Rate.**

**Fast:** 3 Beeps Per Second

**Medium:** 2 Beeps Per Second

**Slow:** 1 Beep Per Second

CASE STYLE	MODEL NUMBER	OPERATING VOLTAGE VDC *VAC	TYPICAL SOUND PRESSURE dBa AT 2 FEET			TYPICAL OPERATING CURRENT (mA)			Terminations
			At min. V	At max. V	Graph Curve	At min. V	At max. V	Graph Curve	
<b>EXTRA LOUD BEEP—FREQUENCY 2900 ±500 Hz</b>									
04	XB-04-312-W	5-12	90	104	05-a	20	60	06-a	W
04	XB-04-312-T	5-12	90	104	05-a	20	60	06-a	T
●04	XB-04-630-W	6-30	90	104	05-b	12	100	06-b	W
●04	XB-04-630-T	6-30	90	104	05-b	12	100	06-b	T
05	XB-05-312-P	5-12	90	104	05-a	20	60	06-a	P
●05	XB-05-630-P	6-30	90	104	05-b	12	100	06-b	P
06	XB-06-312-W	5-12	90	104	05-a	20	60	06-a	W
06	XB-06-312-T	5-12	90	104	05-a	20	60	06-a	T
●06	XB-06-630-W	6-30	90	104	05-b	12	100	06-b	W
●06	XB-06-630-T	6-30	90	104	05-b	12	100	06-b	T
09	XB-09-312-W	5-12	90	104	05-a	20	60	06-a	W
09	XB-09-312-Q	5-12	90	104	05-a	20	60	06-a	Q
09	XB-09-312-S	5-12	90	104	05-a	20	60	06-a	S
●09	XB-09-630-W	6-30	90	104	05-b	12	100	06-b	W
●09	XB-09-630-Q	6-30	90	104	05-b	12	100	06-b	Q
●09	XB-09-630-S	6-30	90	104	05-b	12	100	06-b	S
●19	XB-19-201-Q	*30-120	90	104			50		Q
●19	XB-19-301-Q	*130-220	90	104			50		Q

### LOUD BEEP—FREQUENCY 2900 ±500 Hz



04	LB-04-312-W	5-12	84	97	05-c	20	60	06-c	W
04	LB-04-312-T	5-12	84	97	05-c	20	60	06-c	T
05	LB-05-312-P	5-12	84	97	05-c	20	60	06-c	P
06	LB-06-312-W	5-12	84	97	05-c	20	60	06-c	W
06	LB-06-312-T	5-12	84	97	05-c	20	60	06-c	T
09	LB-09-312-W	5-12	84	97	05-c	20	60	06-c	W
09	LB-09-312-Q	5-12	84	97	05-c	20	60	06-c	Q
09	LB-09-312-S	5-12	84	97	05-c	20	60	06-c	S

●Indicates Recognized Component, Underwriters Laboratory




### NOTE

All intermittent tone alarms are available in dual function (combining beep or continuous tones) on special order.

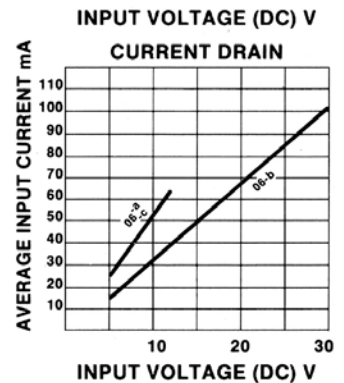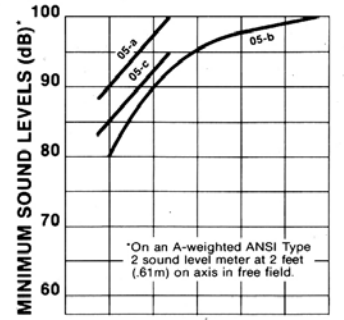

### TERMINATIONS


- W**—Leads: 2 wires 24AWG (7 x 32) tinned copper, vinyl insulated. 2" long, 1/4" end stripped, color-coded.
- P**—PC Pins: 3 PC pins, 90° apart on a .500" R from center, .032" diameter.
- T**—.110 quick connect terminals: .110" width, .020" thickness, brass solder plated for push-on (quick connect) attachment or direct solder.
- Q**—.250" quick connect terminals: .250" width, .033" thickness, brass electro-tin plated for push-on (quick connect) attachment or direct solder.
- S**—Screw terminals: 6/32 1/4" long stainless steel screw for wires with lug attachment.
- L**—.250" quick connect terminals oriented at right angles: .250" width, .033" thickness, brass electro-tin plated for push-on (quick connect) attachment. See L termination drawings, Page 5




CASE STYLE 01, 04, 14  
FLANGED UNIT WITH  
RAISED GRILL



CASE STYLE 02, 05, 15  
NO FLANGE



CASE STYLE 03, 06, 16  
FLANGED VOLUME  
CONTROL



CASE STYLE 07, 09, 19  
PANEL MOUNT, RING  
NUT, RAISED GRILL