

INTERMITTENT TONE

When Ordering: Specify Fast, Medium or Slow Beep Rate.

Fast: 3 Beeps Per Second

Medium: 2 Beeps Per Second

Slow: 1 Beep Per Second

CASE STYLE	MODEL NUMBER	OPERATING VOLTAGE VDC *VAC	TYPICAL SOUND PRESSURE dBa AT 2 FEET			TYPICAL OPERATING CURRENT (mA)			Terminations
			At min. V	At max. V	Graph Curve	At min. V	At max. V	Graph Curve	
MEDIUM BEEP TONE—FREQUENCY 2900 ±500 Hz									
•04	MB-04-516-W	5-16	85	95	07-b	2	24	08-b	W
•04	MB-04-516-Q	5-16	85	95	07-b	2	24	08-b	Q
•05	MB-05-516-P	5-16	85	95	07-b	2	24	08-b	P
•09	MB-09-516-Q	5-16	85	95	07-b	2	24	08-b	Q
•09	MB-09-516-S	5-16	85	95	07-b	2	24	08-b	S
•09	MB-09-516-L	5-16	85	95	07-b	2	24	08-b	L
•04	MB-04-530-W	5-30	75	95	07-a	2	18	08-a	W
•04	MB-04-530-T	5-30	75	95	07-a	2	18	08-a	T
•05	MB-05-530-P	5-30	75	95	07-a	2	18	08-a	P
•06	MB-06-530-W	5-30	75	95	07-a	2	18	08-a	W
•06	MB-06-530-T	5-30	75	95	07-a	2	18	08-a	T
•09	MB-09-530-W	5-30	75	95	07-a	2	18	08-a	W
•09	MB-09-530-Q	5-30	75	95	07-a	2	18	08-a	Q
•09	MB-09-530-S	5-30	75	95	07-a	2	18	08-a	S
•19	MB-19-201-Q	*30-120	75	95			40		Q
•19	MB-19-301-Q	*130-220	75	95			40		Q

LOUD INTERRUPTED BEEP TONE—FREQUENCY 2900 ±500 Hz

05	LP-05-516-P	5-16	85	97	07-c	15	45	08-c	P
09	LP-09-516-Q	5-16	85	97	07-c	15	45	08-c	Q
09	LP-09-516-S	5-16	85	97	07-c	15	45	08-c	S

MEDIUM INTERRUPTED BEEP TONE—FREQUENCY 2900 ±500 Hz



05	MP-05-516-P	5-16	78	90	07-d	10	20	08-d	P
09	MP-09-516-Q	5-16	78	90	07-d	10	20	08-d	Q
09	MP-09-516-S	5-16	78	90	07-d	10	20	08-d	S

MANUAL VOLUME CONTROL (CASE STYLES 03, 06 & 16) OFFERS VARIABLE ATTENUATION FROM 0 TO 20 dB FROM SOUND PRESSURE LEVELS SHOWN.

•Indicates Recognized Component, Underwriters Laboratory

NOTE

All intermittent tone alarms are available in dual function (combining beep or continuous tones) on special order.

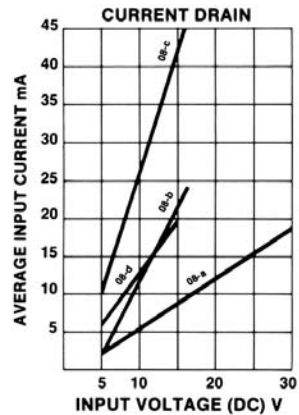

TERMINATIONS

W—Leads: 2 wires 24AWG (7 x 32) tinned copper, vinyl insulated, 2" long, 1/4" end stripped, color-coded.


P—PC Pins: 3 PC pins, 90° apart on a .500" R from center, .032" diameter.

T—.110 quick connect terminals: .110" width, .020" thickness, brass solder plated for push-on (quick connect) attachment or direct solder.

Q—.250" quick connect terminals: .250" width, .033" thickness, brass electro-tin plated for push-on (quick connect) attachment or direct solder.

S—Screw terminals: 6/32 1/4" long stainless steel screw for wires with lug attachment.


L—.250" quick connect terminals oriented at right angles: .250" width, .033" thickness, brass electro-tin plated for push-on (quick connect) attachment. See L termination drawings, Page 5



CASE STYLE 01, 04, 14
FLANGED UNIT WITH
RAISED GRILL



CASE STYLE 02, 05, 15
NO FLANGE



CASE STYLE 03, 06, 16
FLANGED VOLUME
CONTROL



CASE STYLE 07, 09, 19
PANEL MOUNT, RING
NUT, RAISED GRILL