

CHIME TONE/WARBLE TONE

When Ordering: Specify Fast, Moderate or Single Shot Chime Rate.

Fast: Two Chimes Per Second.

Moderate: One Chime Per Second.

Single: Single Shot Chime



Chime Rate Constant Through All Operating Voltages.

CASE STYLE	MODEL NUMBER	OPERATING VOLTAGE VDC *VAC	TYPICAL SOUND PRESSURE dBa AT 2 FEET			TYPICAL OPERATING CURRENT (mA)			Terminations
			At min. V	At max. V	Graph Curve	At min. V	At max. V	Graph Curve	
CHIME TONE—FREQUENCY 2400 ±500 Hz									
04	CH-04-525-W	5-25	70	90	09-a	6	66	10-a	W
04	CH-04-525-T	5-25	70	90	09-a	6	66	10-a	T
05	CH-05-525-P	5-25	70	90	09-a	6	66	10-a	P
06	CH-06-525-W	5-25	70	90	09-a	6	66	10-a	W
06	CH-06-525-T	5-25	70	90	09-a	6	66	10-a	T
09	CH-09-525-W	5-25	70	90	09-a	6	66	10-a	W
09	CH-09-525-Q	5-25	70	90	09-a	6	66	10-a	Q
09	CH-09-525-S	5-25	70	90	09-a	6	66	10-a	S
•19	CH-19-201-Q	*120	70	90			40		Q
•19	CH-19-301-Q	*220	70	90			40		Q

WARBLE TONE—CENTER FREQUENCY 2400 ±500 Hz									
•04	MW-04-616-W	6-16	80	95	09-b	8	18	10-b	W
•04	MW-04-550-W	15-36†	75	95	09-c	3	8	10-c	W
•04	MW-04-201-W	*40-120	75	95		3	8		W
•05	MW-05-616-P	5-16	80	95	09-b	8	18	10-b	P
•05	MW-05-550-P	15-36†	75	95	09-c	3	8	10-c	P
•06	MW-06-616-W	6-16	80	95	09-b	8	18	10-b	W
•06	MW-06-550-W	15-36†	75	95	09-c	3	8	10-c	W
•06	MW-06-201-W	*40-120	75	95		3	8		W
•09	MW-09-616-L	5-16	80	95	09-b	8	18	10-b	L
•09	MW-09-616-W	6-16	80	95	09-b	8	18	10-b	W
•09	MW-09-616-Q	6-16	80	95	09-b	8	18	10-b	Q
•09	MW-09-616-S	6-16	80	95	09-b	8	18	10-b	S
•09	MW-09-550-W	15-36†	75	95	09-c	3	8	10-c	W
•09	MW-09-550-S	15-36†	75	95	09-c	3	8	10-c	S
•09	MW-09-201-W	*40-120	75	95		3	8		W
•09	MW-09-201-S	*40-120	75	95		3	8		S
•09	MW-09-301-W	*140-220	75	95		3	8		W
•09	MW-09-301-S	*140-220	75	95		3	8		S


†Vac-Vdc

•Indicates Recognized Component, Underwriters Laboratory

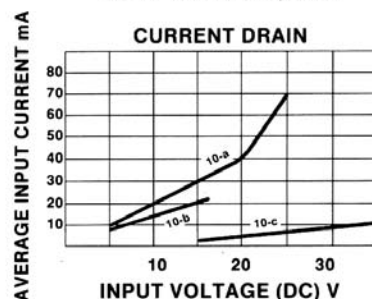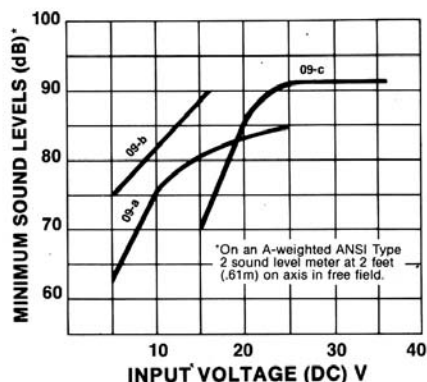

TERMINATIONS


- W—Leads: 2 wires 24AWG (7 x 32) tinned copper, vinyl insulated. 2" long, 1/4" end stripped, color-coded.
- P—PC Pins: 3 PC pins, 90° apart on a .500" R from center, .032" diameter.
- T—.110 quick connect terminals: .110" width, .020" thickness, brass solder plated for push-on (quick connect) attachment or direct solder.
- Q—.250" quick connect terminals: .250" width, .033" thickness, brass electro-tin plated for push-on (quick connect) attachment or direct solder.
- S—Screw terminals: 6/32 1/4" long stainless steel screw for wires with lug attachment.
- L—.250" quick connect terminals oriented at right angles: .250" width, .033" thickness, brass electro-tin plated for push-on (quick connect) attachment. See L termination drawings Page 5



CASE STYLE 01, 04, 14
FLANGED UNIT WITH
RAISED GRILL



CASE STYLE 02, 05, 15
NO FLANGE



CASE STYLE 03, 06, 16
FLANGED VOLUME
CONTROL



CASE STYLE 07, 09, 19
PANEL MOUNT, RING
NUT, RAISED GRILL