


SPEAKERS FOR HEADPHONE

(NdFeB MAGNET + ALUMINUM COIL)

Impedence could be from 4 OHM to 1000 OHM

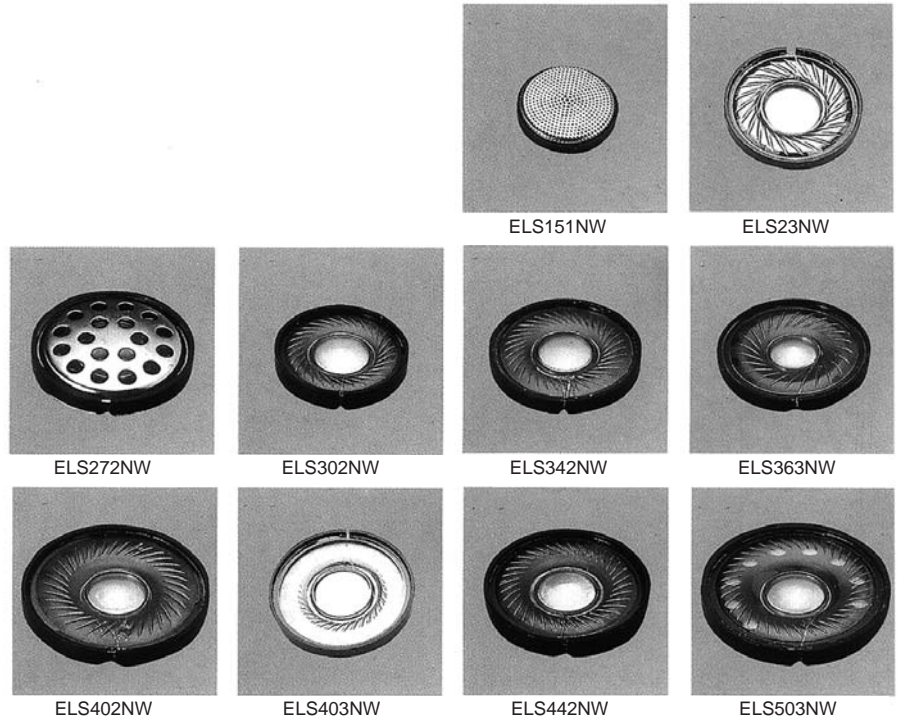

No.	Model	Size		IMP.	Resonant Freq.	Freq. Range	Sensitivity	Power Input		Magnet Size	Speaker N.W.	Packing
		Dia.	High					Nom	Max			
		mm	mm	Ω	Hz	Hz (fo)	dB (+/- 3dB)	mW	mW	mm	g	PCS/NW/GW
1	ELS151NW	14.7	6.5	16	210	18K	116	10	30	6.5×2×1.5	2	4000/8/9
2	ELS23NW	23	7.8	32	170	20K	120	30	100	9.5×1.5	3.8	2000/9.5/10.5
3	ELS272NW	27	5.5	32	160	20K	118	40	100	12.5×1.5	4.8	1000/9/10
4	ELS302NW	30	6	32	150	20K	119	40	150	12.5×1.5	5.4	1000/7/8
5	ELS342NW	34	5.2	40	140	20K	119	40	150	12.5×1.5	4.8	1000/8/9
6	ELS363NW	36	6	40	120	20K	119	40	150	12.5×1.5	6	1000/12/13
7	ELS402NW	40	6.5	40	120	20K	118	40	150	12.5×1.5	7	800/11/12
8	ELS403NW	40	7.6	32	110	20K	112	40	150	12.5×1.5	11	800/13/14
9	ELS442NW	44	8.2	32	110	20K	117	40	150	12.5×1.5	13	1000/12/13
10	ELS503NW	50	9	32	110	20K	108	40	150	12.5×1.5	15	800/13/14

■ TEST CONDITION: 1 mW, at MIC. 1cm (ARTIFICIAL EAR)