


# SPEAKERS FOR COMPUTER, TELEPHONE, ALARM, TOY...

(FERRITE MAGNET)

Impedence could be from 4 OHM to 1000 OHM

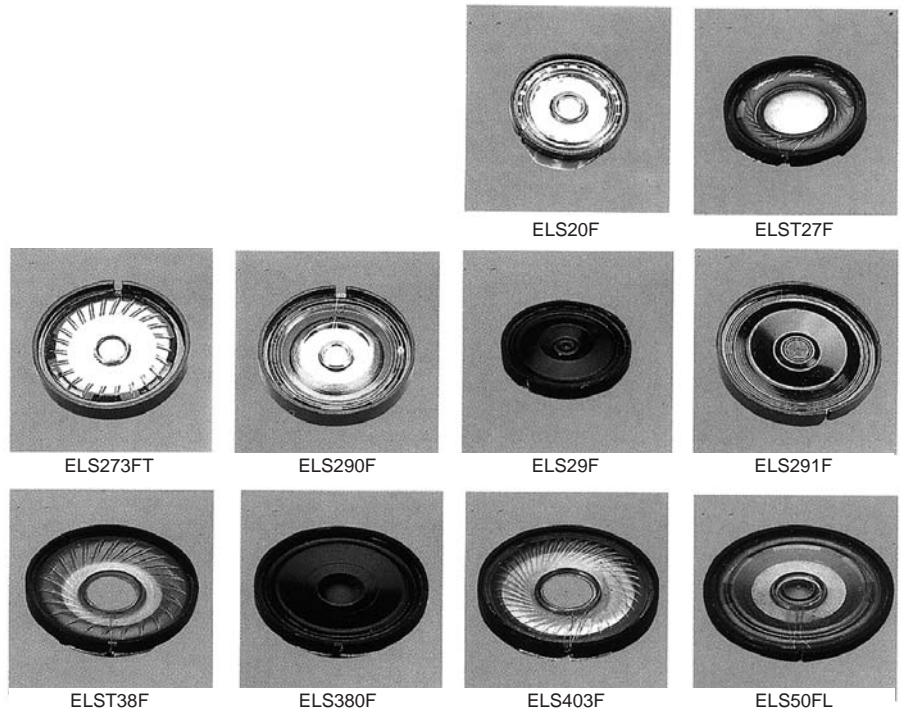

No.	Model	Size		IMP.	Resonant Freq.	Freq. Range	Sensitivity	Power Input		Magnet Size	Speaker N.W.	Packing
		Dia.	High					Nom	Max			
		mm	mm	$\Omega$	Hz	Hz (fo)	dB (+/- 3dB)	mW	mW	mm	g	PCS/NW/GW
1	ELS20F	20	9.2	8	700	5.2K	91	100	200	16 x 7 x 5	7.4	1000/8.5/9.5
2	ELST27F	27	7.8	8	500	20K	82	100	200	12 x 3.8	5.8	2000/14/15
3	ELS273FT	27	6	8	300	5K	86	100	200	16 x 7 x 3	6.0	2000/15/16
4	ELS290F	29	9.5	8	700	4K	87	100	200	16 x 7 x 5	8.2	1000/9.5/10.5
5	ELS29F	29	6.8	8	700	4.4K	92	100	200	21 x 7 x 3	6.8	1000/9.5/10.5
6	ELS291F	29	6.8	8	700	4.5K	90	100	200	21 x 10 x 3	9.4	1000/9.5/10.5
7	ELST38F	38	10	8	320	9K	87	100	200	27 x 17 x 3	18	1000/21/22
8	ELS380F	38	11	8	300	5K	92	200	300	27 x 17 x 5	26	800/25/26
9	ELS403F	40	8	8	300	4.5K	90	100	200	32 x 14.5 x 3	21.6	1000/15/16
10	ELS50FL	50	8	8	430	7K	92	100	200	27 x 17 x 3	20	500/13/14

■ TEST CONDITION: 01 W, at MIC. 10cm, in box 400 CM<sup>3</sup>