


SPEAKERS FOR COMPUTER, TELEPHONE, ALARM, TOY...

(NdFeB MAGNET)

Impedence could be from 4 OHM to 1000 OHM

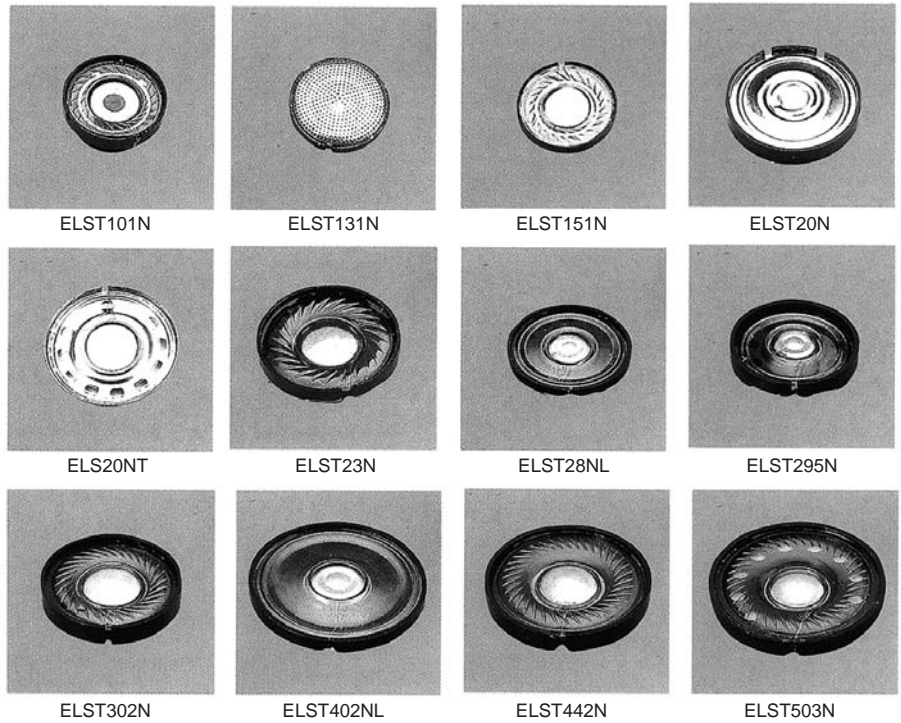

No.	Model	Size		IMP.	Resonant Freq.	Freq. Range	Sensitivity	Power Input		Magnet Size	Speaker N.W.	Packing
		Dia.	High					Nom	Max			
		mm	mm	Ω	Hz	Hz (fo)	dB (+/- 3dB)	mW	mW	mm	g	PCS/NW/GW
1	ELST101N	10	4.8	8	320	5K	80	100	200	5 × 2 × 1.5	1.5	4000/5.5/6.5
2	ELST131N	13.5	5.5	8	300	5K	81	100	200	6.5 × 1.5	2	4000/6/7
3	ELST151N	14.7	4.8	8	500	4.5K	83	100	200	6.5 × 1.5	2	4000/6.5/7.5
4	ELST20N	20	4	8	700	5K	90	100	200	6.5 × 1.5	1.8	2000/6/7
5	ELS20NT	20	3	8	700	9K	92	100	200	7.5 × 1	2	2000/6/7
6	ELST23N	23	5.5	8	320	20K	89	100	200	9.5 × 1.5	3.8	2000/7.5/8.5
7	ELST28NL	28	4	8	480	5K	88	100	200	9.5 × 1.5	3	1000/6/7
8	ELST295N	29	5.2	8	550	8K	91	100	200	9.5 × 1.5	3.8	1000/5/6
9	ELST302N	30	6	8	550	4K	90	150	200	12.5 × 1.5	5.6	1000/6.5/7.5
10	ELST402NL	40	5	8	500	5K	95	150	200	12.5 × 1.5	6.5	1000/12/13
11	ELST442N	44	8.2	8	300	8.5K	94	150	200	12.5 × 1.5	12.7	1000/12/13
12	ELST503N	50	9	8	300	9K	92	150	200	12.5 × 1.5	14	800/14/15

■ TEST CONDITION: 01 W, at MIC. 10cm, in box 400 CM³