


SPECIFICATION



- 1. Panel material: 1.6 m/m thickness Metal, Black color painting.*
- 2. RJ45 Jack: 8P8C 45 Degree Angle type, PBT UL 94V-0 rated, Yellow color.*
- 3. Connector: 110D connectors UL 94V-2 PC, Light-Yellow color.*
- 4. P.C.board: FR4 P.C.B. 1.6 m/m thickness, double side.*
- 5. Jack Bracket Set: ABS UL 94V-0 rated, Black color.*

Used for Color Coding Identification, Color optional.

- 6. Screws: Round head, $\phi 3 \times 20$ m/m, Silver color.*




Category 5e Patch Panel, 45 Degree Angle type.

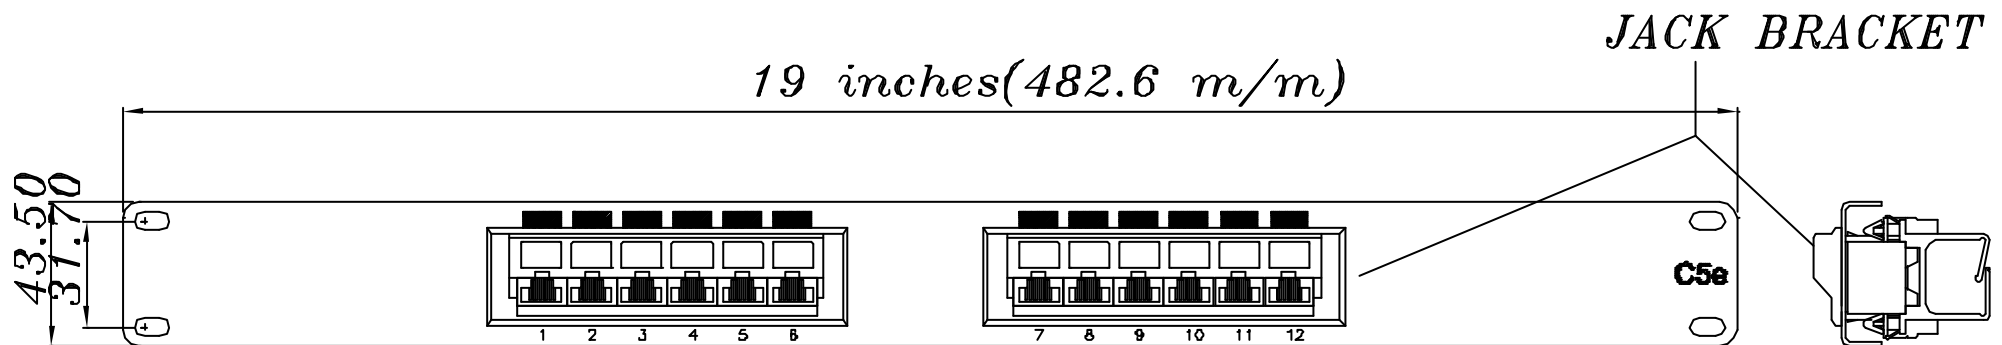

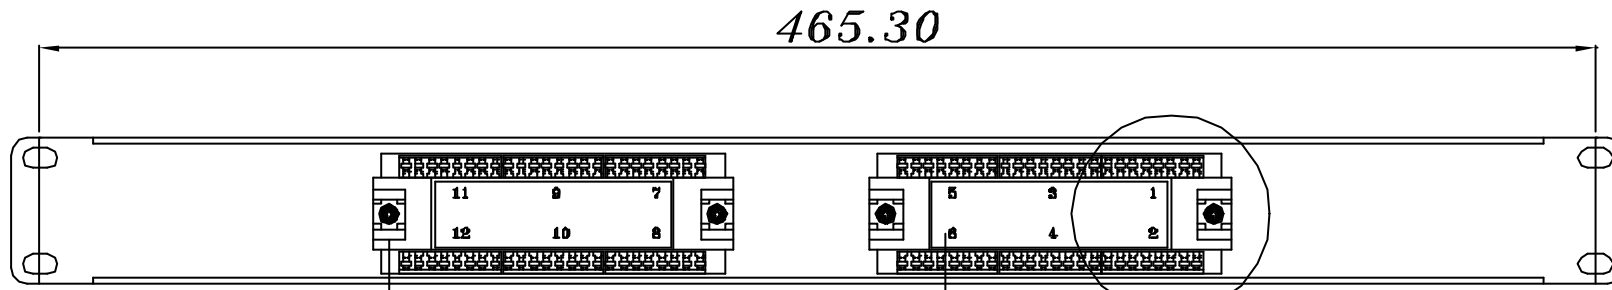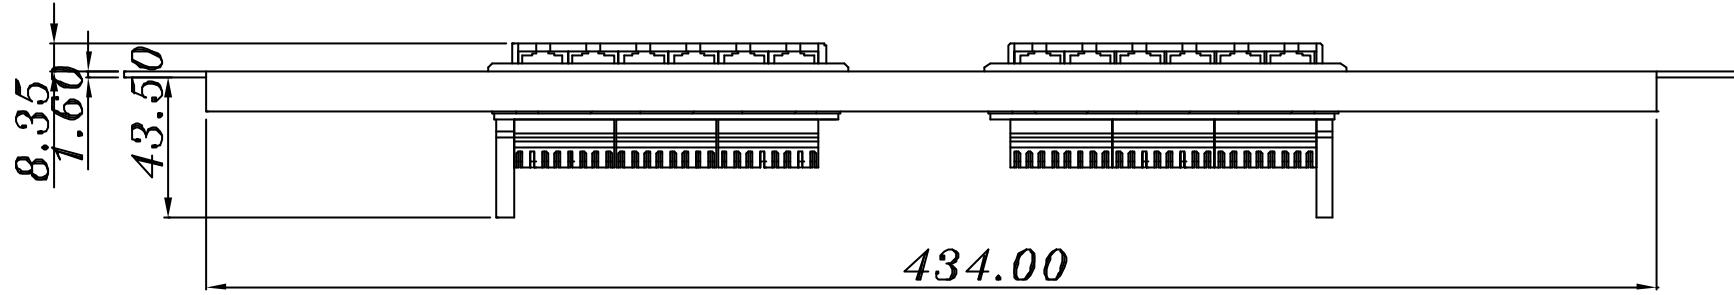

*CABLE BUCKLE
FOR CABLE TIE*

PORT INDICATION

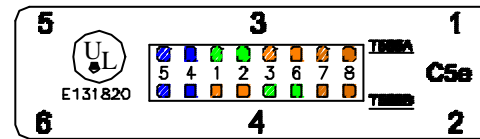

T568A WIRING

- PIN 5 WHITE/BLUE
- PIN 4 BLUE
- PIN 1 WHITE/GREEN
- PIN 2 GREEN
- PIN 3 WHITE/ORANGE
- PIN 6 ORANGE
- PIN 7 WHITE/BROWN
- PIN 8 BROWN

T568B WIRING

- PIN 5 WHITE/BLUE
- PIN 4 BLUE
- PIN 1 WHITE/ORANGE
- PIN 2 ORANGE
- PIN 3 WHITE/GREEN
- PIN 6 GREEN
- PIN 7 WHITE/BROWN
- PIN 8 BROWN

