


## ***SPECIFICATION***



- 1. Panel material: 1.6 m/m thickness Metal, Black color painting.*
- 2. RJ45 Jack: 8P8C 45 Degree Angle type, PBT UL 94V-0 rated, Yellow color.*
- 3. Connector: 110D connectors UL 94V-2 PC, Light-Yellow color.*
- 4. P.C.board: FR4 P.C.B. 1.6 m/m thickness, double side.*
- 5. Jack Bracket Set: ABS UL 94V-0 rated, Black color.*

*Used for Color Coding Identification, Color optional.*

- 6. Screws: Round head,  $\phi 3$  x 20 m/m, Silver color.*



### ***Category 5 Patch Panel, Top Entry type.***

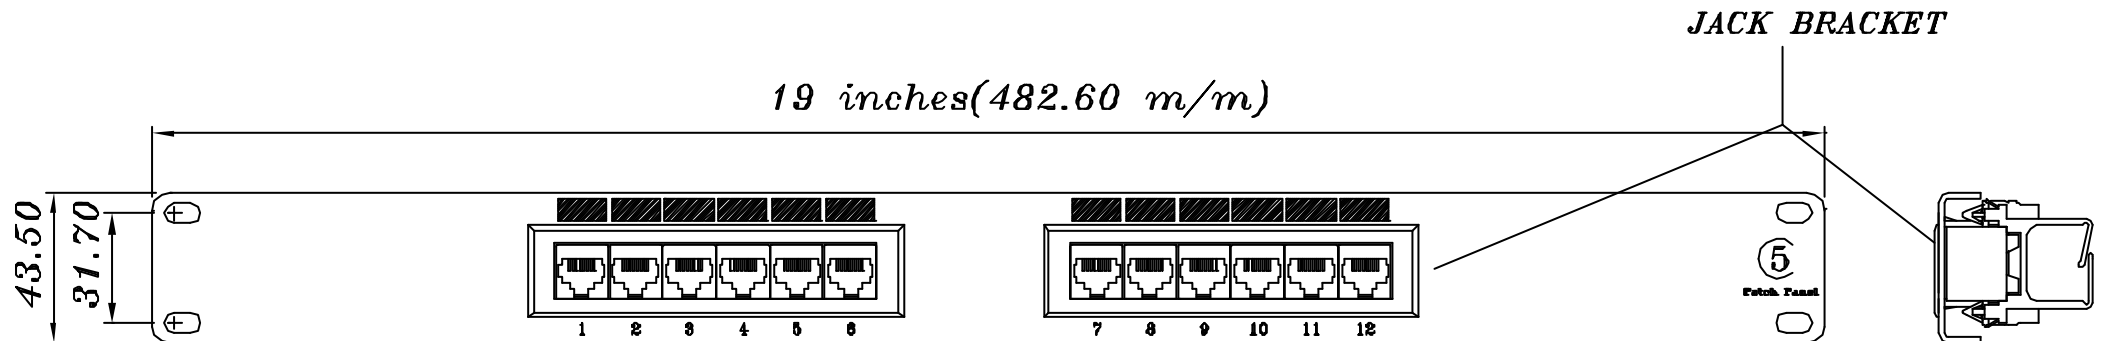

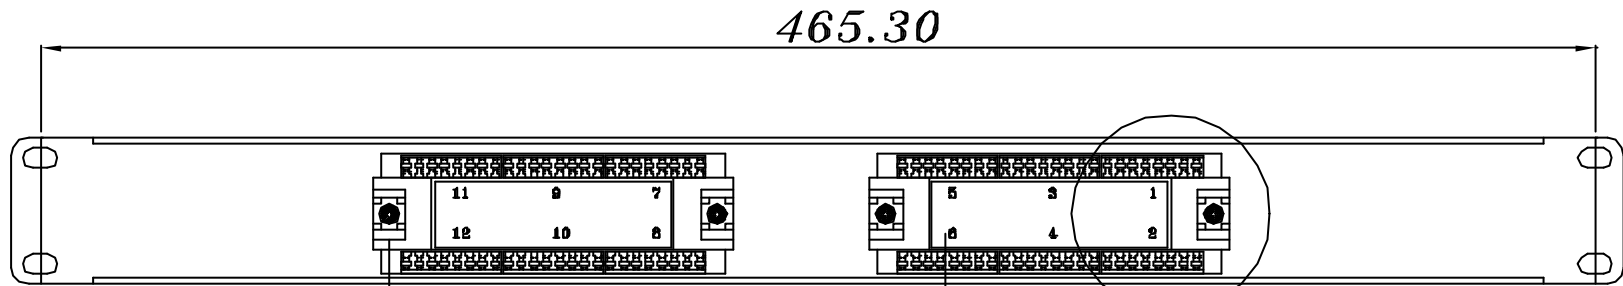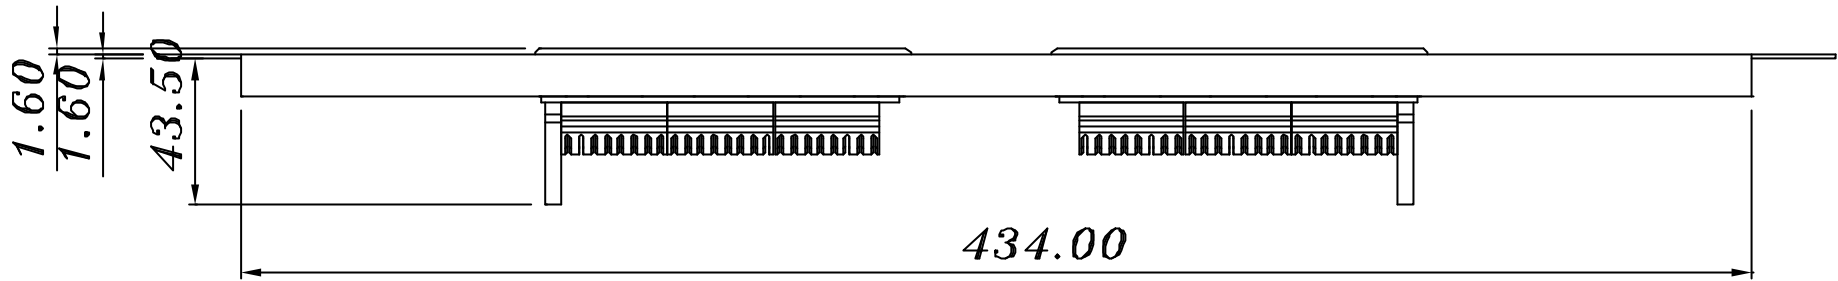

*CABLE BUCKLE  
FOR CABLE TIE*

*PORT INDICATION*



<b>5</b>			<b>3</b>	<b>1</b>
			UL Listed Patch Panel TRM2	WIRING
				<input type="checkbox"/> T568A
				<input type="checkbox"/> T568B
				<input type="checkbox"/> T568A/B
<b>6</b>			<b>4</b>	<b>2</b>
			UL Cat. 5 Certified Customer Lifetime Check Assembly	

<u>T568A WIRING</u>		<u>T568B WIRING</u>	
PIN 5	WHITE/BLUE	PIN 5	WHITE/BLUE
PIN 4	BLUE	PIN 4	BLUE
PIN 1	WHITE/GREEN	PIN 1	WHITE/ORANGE
PIN 2	GREEN	PIN 2	ORANGE
PIN 3	WHITE/ORANGE	PIN 3	WHITE/GREEN
PIN 6	ORANGE	PIN 6	GREEN
PIN 7	WHITE/BROWN	PIN 7	WHITE/BROWN
PIN 8	BROWN	PIN 8	BROWN

