


GENERAL ALNICO TYPE SPEAKERS

ELSA15CO2




DIAMETER 38mm (1½ inch)
VOICE COIL IMPEDANCE 8 ohms
SENSITIVITY 80dB/w/m
NOM. POWER 0.1 watt
MAX. POWER 0.2 watt
RESONANCE FREQUENCY 800Hz
FREQUENCY RANGE f₀ ~ 4000Hz
DEPTH 17.3mm (0.68 inch)
MOUNTING DIAMETER -mm (-inch)
MAGNET WEIGHT 9.8g (0.35oz)
NET WEIGHT 28.8g (1.02oz)

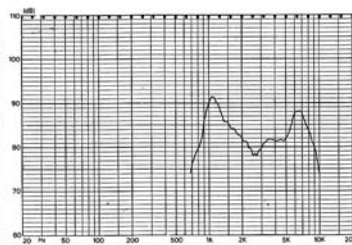

ELSA15CO3




DIAMETER 40mm (1½ inch)
VOICE COIL IMPEDANCE 8 ohms
SENSITIVITY 80dB/w/m
NOM. POWER 0.1 watt
MAX. POWER 0.2 watt
RESONANCE FREQUENCY 700Hz
FREQUENCY RANGE f₀ ~ 4000Hz
DEPTH 16.5mm (0.65 inch)
MOUNTING DIAMETER -mm (-inch)
MAGNET WEIGHT 9.8g (0.35oz)
NET WEIGHT 21.9g (0.77oz)

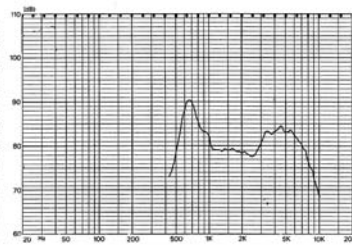

ELSA17CO1




DIAMETER 45mm (1¾ inch)
VOICE COIL IMPEDANCE 8 ohms
SENSITIVITY 84dB/w/m
NOM. POWER 0.1 watt
MAX. POWER 0.2 watt
RESONANCE FREQUENCY 600Hz
FREQUENCY RANGE f₀ ~ 4000Hz
DEPTH 18mm (0.71 inch)
MOUNTING DIAMETER -mm (-inch)
MAGNET WEIGHT 9.8g (0.35oz)
NET WEIGHT 38g (1.34oz)

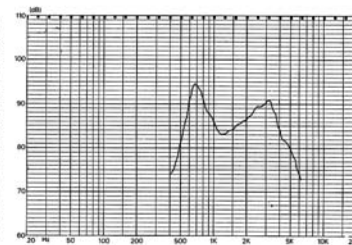

ELSA20C01



DIAMETER 50mm (2 inch)
VOICE COIL IMPEDANCE 8 ohms
SENSITIVITY 84dB/w/m
NOM. POWER 0.2 watt
MAX. POWER 0.3 watt
RESONANCE FREQUENCY 500Hz
FREQUENCY RANGE f₀ ~ 4000Hz
DEPTH 19mm (0.75 inch)
MOUNTING DIAMETER -mm (-inch)
MAGNET WEIGHT 9.8g (0.35oz)
NET WEIGHT 39.3g (1.39oz)

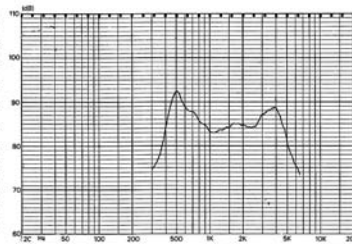

ELSA20C05



DIAMETER 50mm (2 inch)
VOICE COIL IMPEDANCE 8 ohms
SENSITIVITY 84dB/w/m
NOM. POWER 0.2 watt
MAX. POWER 0.3 watt
RESONANCE FREQUENCY 500Hz
FREQUENCY RANGE f₀ ~ 4000Hz
DEPTH 19mm (0.75 inch)
MOUNTING DIAMETER 60.0mm (2.36 inch)
MAGNET WEIGHT 9.8g (0.35oz)
NET WEIGHT 41.2g (1.49oz)

