


GENERAL MYLAR TYPE SPEAKERS

ELSA27M01




DIAMETER 70mm (2¾ inch)
VOICE COIL IMPEDANCE 8 ohms
SENSITIVITY 85dB/w/m
NOM. POWER 0.4 watt
MAX. POWER 0.6 watt
RESONANCE FREQUENCY 350Hz
FREQUENCY RANGE f_o ~ 5000Hz
DEPTH 22.1mm (0.87 inch)
MOUNTING DIAMETER -mm (-inch)
MAGNET WEIGHT 9.8g (0.35oz)
NET WEIGHT 46.8g (1.65oz)

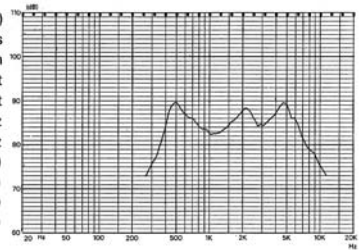

ELSA30M18




DIAMETER 77mm (3 inch)
VOICE COIL IMPEDANCE 8 ohms
SENSITIVITY 86dB/w/m
NOM. POWER 1 watt
MAX. POWER 2 watt
RESONANCE FREQUENCY 300Hz
FREQUENCY RANGE f_o ~ 5000Hz
DEPTH 27.8mm (1.09 inch)
MOUNTING DIAMETER -mm (-inch)
MAGNET WEIGHT 11.7g (0.41oz)
NET WEIGHT 57g (2.01oz)

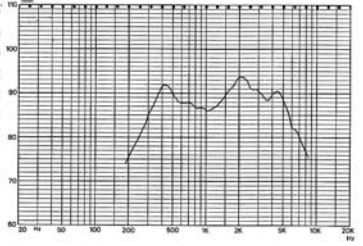

ELSF33M03




DIAMETER 87mm (3⅞ inch)
VOICE COIL IMPEDANCE 8 ohms
SENSITIVITY 86dB/w/m
NOM. POWER 5 watt
MAX. POWER 8 watt
RESONANCE FREQUENCY 300Hz
FREQUENCY RANGE f_o ~ 10000Hz
DEPTH 29.7mm (1.17 inch)
MOUNTING DIAMETER 102.0mm (4.02 inch)
MAGNET WEIGHT 81g (0.86oz)
NET WEIGHT 320.7g (11.31oz)

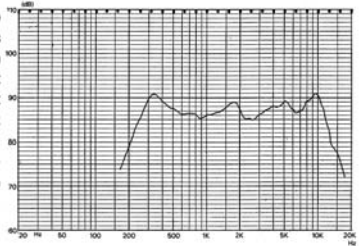

ELSA35M01



DIAMETER 92mm (3½ inch)
VOICE COIL IMPEDANCE 8 ohms
SENSITIVITY 84dB/w/m
NOM. POWER 1 watt
MAX. POWER 2 watt
RESONANCE FREQUENCY 250Hz
FREQUENCY RANGE f_o ~ 10000Hz
DEPTH 28mm (1.1 inch)
MOUNTING DIAMETER -mm (-inch)
MAGNET WEIGHT 9.8g (0.35oz)
NET WEIGHT 59.1g (2.08oz)

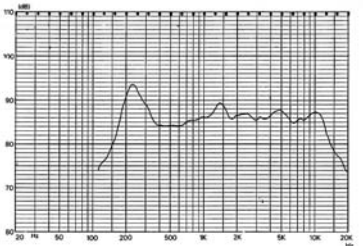

ELSA40M02



DIAMETER 102mm (4 inch)
VOICE COIL IMPEDANCE 8 ohms
SENSITIVITY 84dB/w/m
NOM. POWER 2 watt
MAX. POWER 3 watt
RESONANCE FREQUENCY 220Hz
FREQUENCY RANGE f_o ~ 10000Hz
DEPTH 36.5mm (1.44 inch)
MOUNTING DIAMETER -mm (-inch)
MAGNET WEIGHT 11.7g (0.41oz)
NET WEIGHT 77.4g (2.73oz)

