


OVAL TYPE SPEAKERS

ELSA1527C02




DIAMETER 41×72mm (1 1/2 × 2 3/4 inch)
 VOICE COIL IMPEDANCE 8 ohms
 SENSITIVITY 82dB/w/m
 NOM. POWER 2 watt
 MAX. POWER 5 watt
 RESONANCE FREQUENCY 450Hz
 FREQUENCY RANGE fo ~ 20000Hz
 DEPTH 30mm (1.18 inch)
 MOUNTING DIAMETER 33×63mm (1.30×2.48 inch)
 MAGNET WEIGHT 11.7g (0.41oz)
 NET WEIGHT 55.4g (1.95oz)

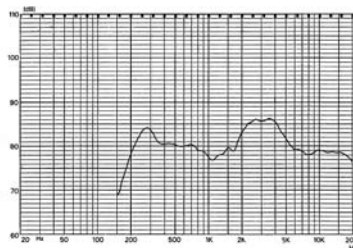

ELSA1727C01




DIAMETER 48×72mm (1 3/4 × 2 3/4 inch)
 VOICE COIL IMPEDANCE 8 ohms
 SENSITIVITY 84dB/w/m
 NOM. POWER 0.4 watt
 MAX. POWER 0.6 watt
 RESONANCE FREQUENCY 500Hz
 FREQUENCY RANGE fo ~ 4500Hz
 DEPTH 25mm (0.98 inch)
 MOUNTING DIAMETER -mm (-inch)
 MAGNET WEIGHT 9.8g (0.35oz)
 NET WEIGHT 44.3g (1.56oz)

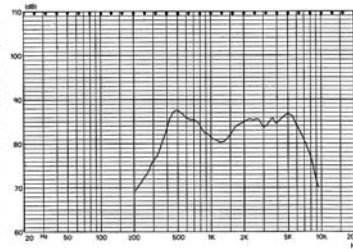

ELSF2035C03




DIAMETER 50×90mm (2 × 3 1/2 inch)
 VOICE COIL IMPEDANCE 8 ohms
 SENSITIVITY 82dB/w/m
 NOM. POWER 3 watt
 MAX. POWER 5 watt
 RESONANCE FREQUENCY 200Hz
 FREQUENCY RANGE fo ~ 20000Hz
 DEPTH 37.8mm (1.49 inch)
 MOUNTING DIAMETER 40×75mm (1.57×2.95 inch)
 MAGNET WEIGHT 16.5g (0.58oz)/16.5g (0.58oz)
 NET WEIGHT 112.5g (3.97oz)

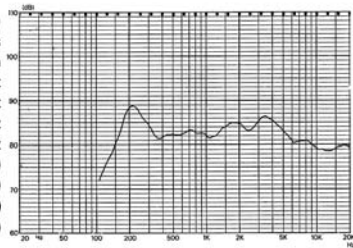

ELSA2235C01



DIAMETER 60×90mm (2 1/4 × 3 1/2 inch)
 VOICE COIL IMPEDANCE 8 ohms
 SENSITIVITY 85dB/w/m
 NOM. POWER 0.5 watt
 MAX. POWER 0.8 watt
 RESONANCE FREQUENCY 350Hz
 FREQUENCY RANGE fo ~ 5000Hz
 DEPTH 29.3mm (1.15 inch)
 MOUNTING DIAMETER 47×77mm (1.85×3.03 inch)
 MAGNET WEIGHT 9.8g (0.35oz)
 NET WEIGHT 54.7g (1.93oz)

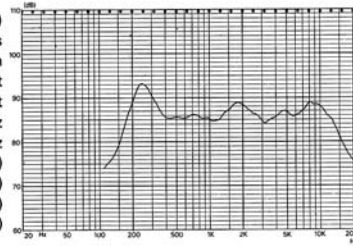

ELSF2235C03



DIAMETER 55×90mm (2 1/4 × 3 1/2 inch)
 VOICE COIL IMPEDANCE 8 ohms
 SENSITIVITY 82dB/w/m
 NOM. POWER 3 watt
 MAX. POWER 5 watt
 RESONANCE FREQUENCY 180Hz
 FREQUENCY RANGE fo ~ 15000Hz
 DEPTH 43.5mm (1.71 inch)
 MOUNTING DIAMETER -mm (-inch)
 MAGNET WEIGHT 35.0g (1.23oz)/16.5g (0.58oz)
 NET WEIGHT 180.9g (6.38oz)

