


WOOFERS

ELSF80C11




DIAMETER 205mm (8 inch)
 VOICE COIL IMPEDANCE 8 ohms
 SENSITIVITY 88dB/w/m
 NOM. POWER 10 watt
 MAX. POWER 25 watt
 RESONANCE FREQUENCY 50Hz
 FREQUENCY RANGE fo ~ 5000Hz
 DEPTH 83.5mm (3.29 inch)
 MOUNTING DIAMETER 195.0mm (7.68 inch)
 MAGNET WEIGHT 282.5g (9.96oz)
 NET WEIGHT 1186.6g (41.85oz)

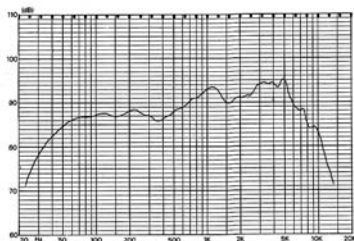

ELSF80C12




DIAMETER 210mm (8 inch)
 VOICE COIL IMPEDANCE 8 ohms
 SENSITIVITY 88dB/w/m
 NOM. POWER 15 watt
 MAX. POWER 30 watt
 RESONANCE FREQUENCY 40Hz
 FREQUENCY RANGE fo ~ 4000Hz
 DEPTH 90mm (3.54 inch)
 MOUNTING DIAMETER 198.0mm (7.79 inch)
 MAGNET WEIGHT 377g (13.3oz)
 NET WEIGHT 1681.1g (59.29oz)

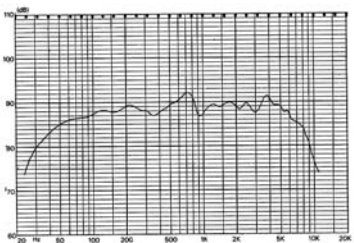

ELSF100C01




DIAMETER 250mm (10 inch)
 VOICE COIL IMPEDANCE 8 ohms
 SENSITIVITY 88dB/w/m
 NOM. POWER 20 watt
 MAX. POWER 40 watt
 RESONANCE FREQUENCY 30Hz
 FREQUENCY RANGE fo ~ 2000Hz
 DEPTH 115.6mm (4.55 inch)
 MOUNTING DIAMETER 271.0mm (10.67 inch)
 MAGNET WEIGHT 400.5g (14.12oz)
 NET WEIGHT 1890.9g (66.69oz)

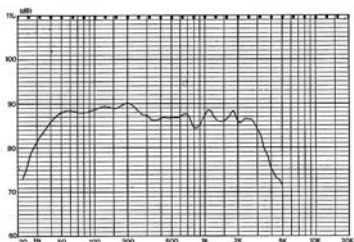

ELSF100C03



DIAMETER 250mm (10 inch)
 VOICE COIL IMPEDANCE 8 ohms
 SENSITIVITY 88dB/w/m
 NOM. POWER 20 watt
 MAX. POWER 40 watt
 RESONANCE FREQUENCY 30Hz
 FREQUENCY RANGE fo ~ 2000Hz
 DEPTH 109.7mm (4.32 inch)
 MOUNTING DIAMETER 249.0mm (9.80 inch)
 MAGNET WEIGHT 502.6g (17.72oz)
 NET WEIGHT 2140.2g (75.48oz)

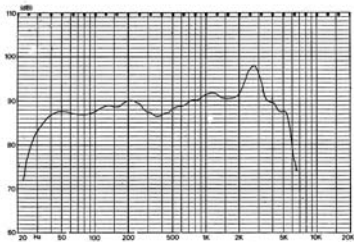

ELSF120C01



DIAMETER 300mm (12 inch)
 VOICE COIL IMPEDANCE 8 ohms
 SENSITIVITY 90dB/w/m
 NOM. POWER 25 watt
 MAX. POWER 50 watt
 RESONANCE FREQUENCY 25 Hz
 FREQUENCY RANGE fo ~ 2000Hz
 DEPTH 123.6mm (4.87 inch)
 MOUNTING DIAMETER 291.0mm (11.46 inch)
 MAGNET WEIGHT 377g (13.3oz)
 NET WEIGHT 2456g (86.62oz)

